



Clean water



Domestic use



Civil use



PERFORMANCE RANGE

- Flow rate up to **120 l/min** (7.2 m³/h)
- Head up to **267 m**

INSTALLATION AND USE

3-inch submersible pumps are designed to transfer clean water, making them perfect for household use, irrigation, and small community water systems.

KEY FEATURES

The increased efficiency of 3SR pumps not only saves electricity but also offers economic advantages. Their small size and light build allow for easy installation in wells 3 inches wide or more.

With a blend of hydraulic parts and a high-efficiency motor, 3SR pumps excel in the 3-inch category, capable of handling water with up to **150 g/m³** of sand.

ELECTRIC MOTOR

- **Rewindable** motor in oil bath (non-toxic food-safe oil) 2-pole, 50 Hz
- Voltage:
 - single-phase 230 V
 - three-phase 400 V
- Continuous running duty **S1**
- Insulation: Class F
- Protection rating: IP 68
- Shaft and sleeve: **AISI 304** stainless steel
- Flange coupling dimensions to NEMA standard
- Connector with power cable from:
 - **1.5 m** for power up to 0.75 kW
 - **2.0 m** for power ratings from 1.1 kW

APPLICATION LIMITS


- Liquid temperature up to **+35 °C**
- Maximum sand content **150 g/m³**
- Capable of operating at depths of up to **100 metres** below water level (with an appropriately sized power cable)
- Vertical operation
- Starts per hour: **20** at regular intervals
- Minimum motor cooling flow **8 cm/s**

AVAILABLE UPON REQUEST

- ✗ **10, 20, 30 or 40 metres** long power cable
- ✗ Different voltage requirements 60 Hz frequency

PERFORMANCE RANGE

50 Hz

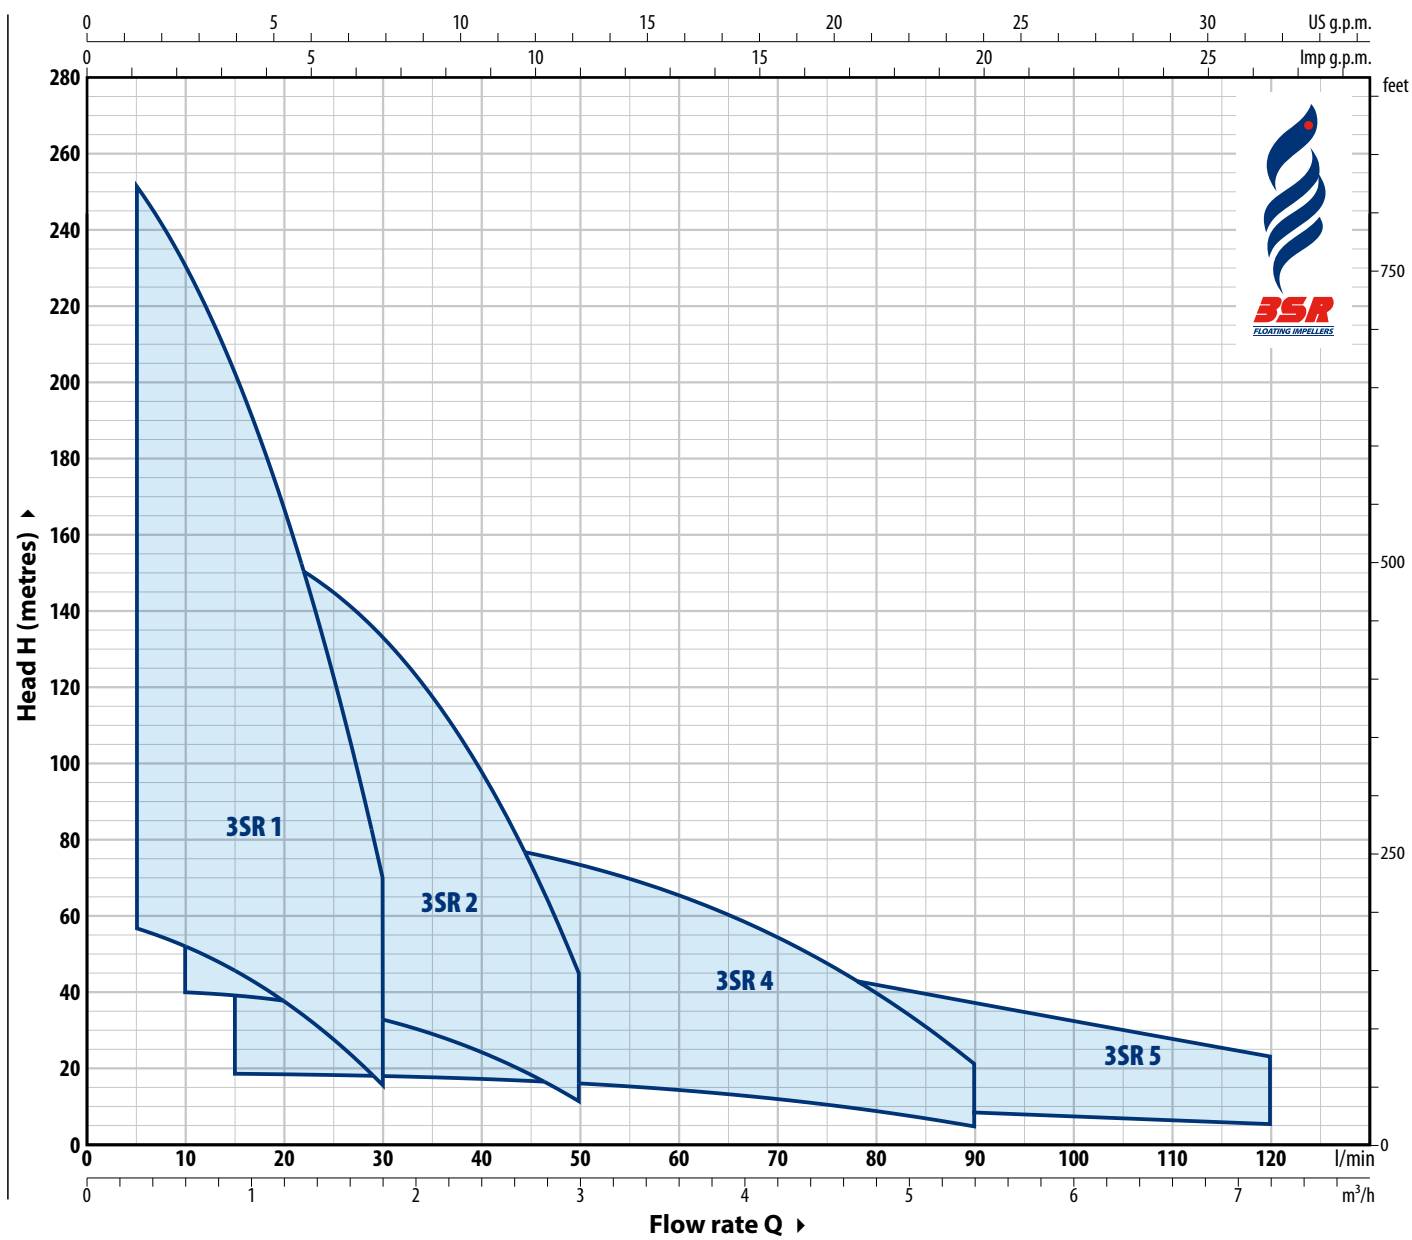

PATENTS:

- Patent No. EP3123031, EP2419642




3SR 3" submersible pumps


CURVES AND PERFORMANCE DATA

50 Hz

3SR 1

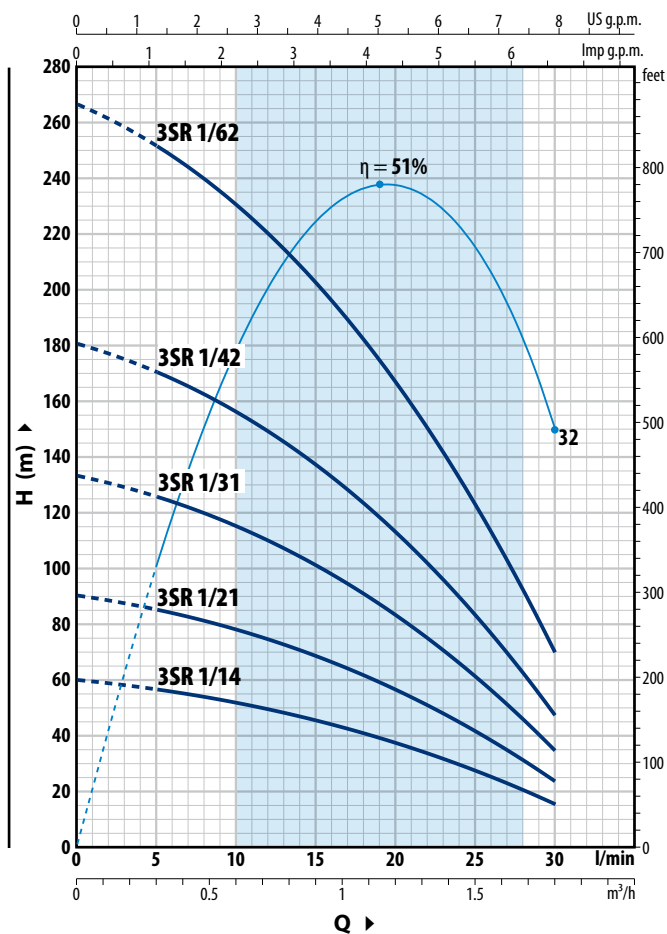

3SR 2

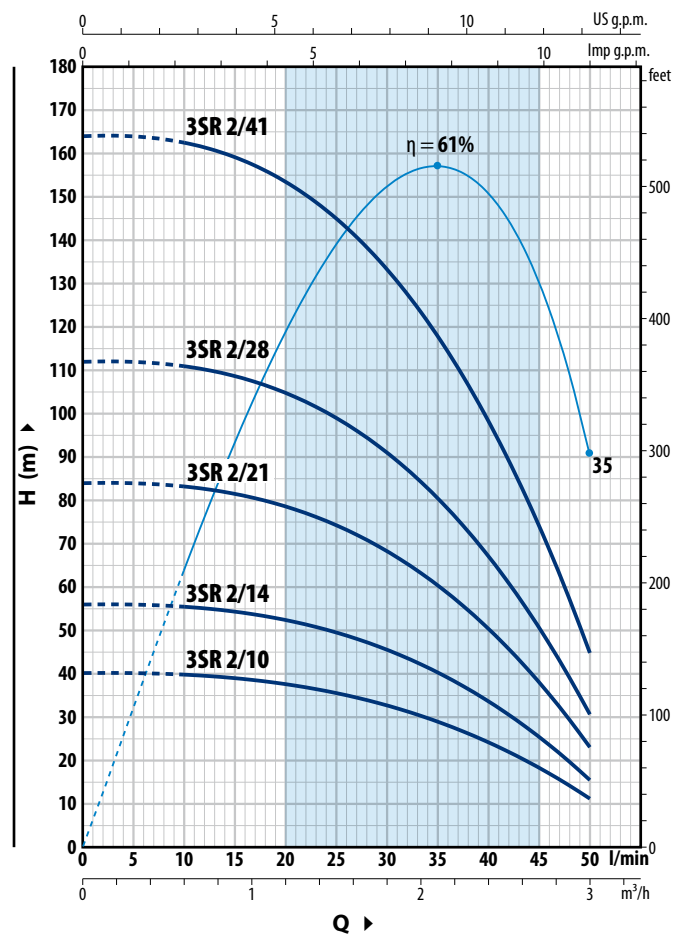

3SR 1

TYPE		POWER (P ₂)		Q m ³ /h l/min	0	0.3	0.6	0.9	1.2	1.5	1.8
Single-phase	Three-phase	kW	HP		0	5	10	15	20	25	30
3SRm 1/14	3SR 1/14	0.25	0.33	H metres	60	57	52	45.5	37.5	28	16
3SRm 1/21	3SR 1/21	0.37	0.50		90	85	78	68.5	56.5	41.5	24
3SRm 1/31	3SR 1/31	0.55	0.75		133	126	115	101	83	61.5	35
3SRm 1/42	3SR 1/42	0.75	1		181	170	156	137	113	83	47.5
3SRm 1/62	3SR 1/62	1.1	1.5		267	252	230	203	167	123	70

3SR 2

TYPE		POWER (P ₂)		Q	m ³ /h l/min	0	0.6	0.9	1.2	1.5	1.8	2.1	2.4	3
Single-phase	Three-phase	kW	HP			0	10	15	20	25	30	35	40	50
3SRm 2/10	3SR 2/10	0.25	0.33	H metres	40	39.5	39	37.5	35.5	32.5	28.5	24	11	
3SRm 2/14	3SR 2/14	0.37	0.50		56	55.5	54.5	52.5	49.5	45.5	40	33.5	15.5	
3SRm 2/21	3SR 2/21	0.55	0.75		84	83	81	79	74	68	60.5	50.5	23	
3SRm 2/28	3SR 2/28	0.75	1		112	111	109	105	99	91	80	67	30.5	
3SRm 2/41	3SR 2/41	1.1	1.5		164	162	159	153	145	133	118	98	45	


Q = Flow rate H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.


CURVES AND PERFORMANCE DATA

50 Hz

3SR 4

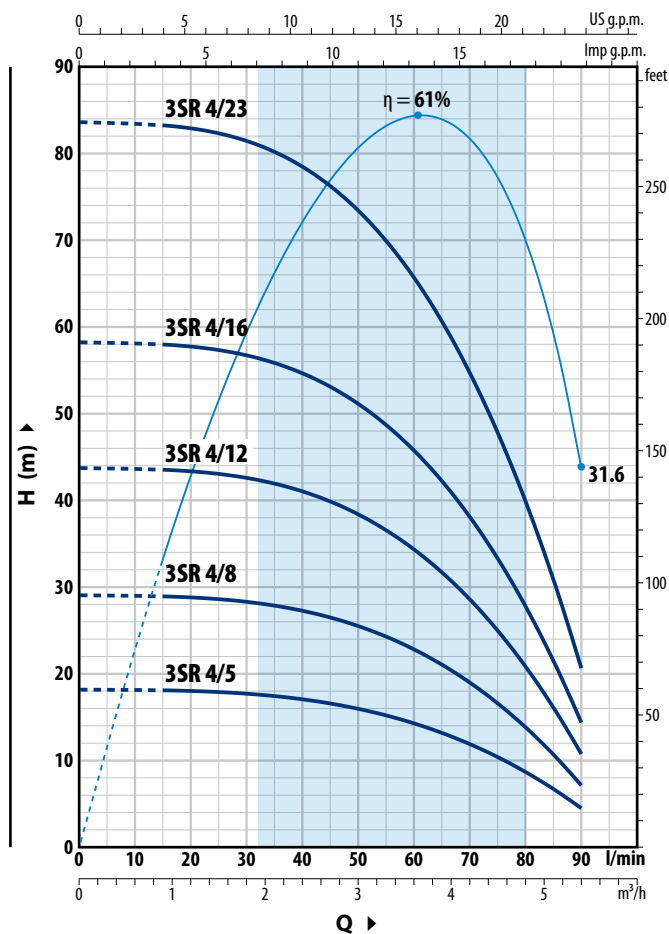

3SR 5

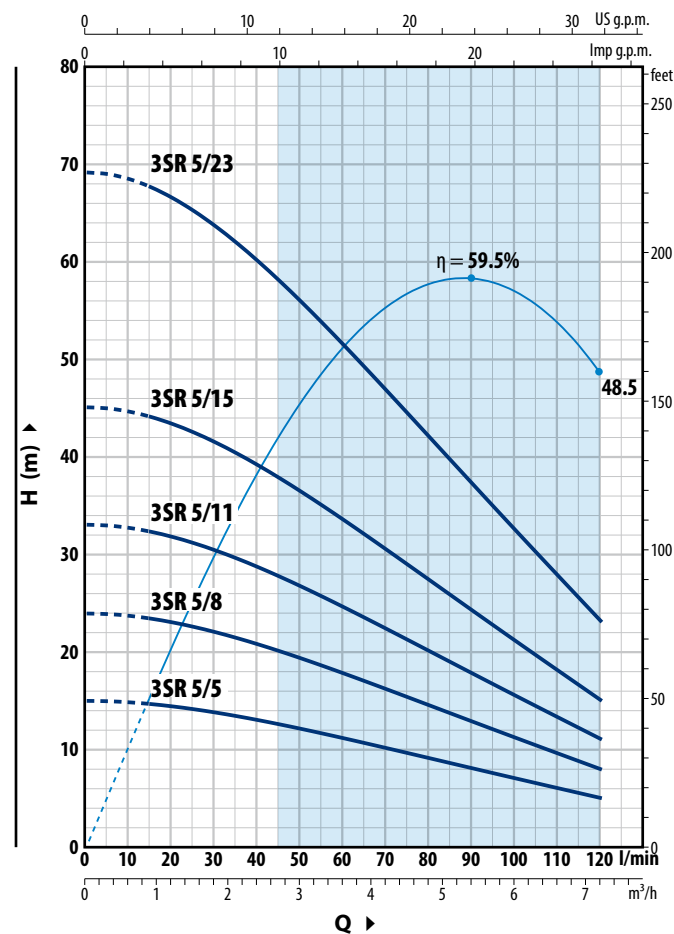

3SR 4

TYPE		POWER (P ₂)		Q	m ³ /h	0	0.9	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4
Single-phase	Three-phase	kW	HP		l/min	0	15	20	30	40	50	60	70	80	90
3SRm 4/5	3SR 4/5	0.25	0.33	H metres	18	18	18	17.8	17.1	16	14.3	12	8.7	4.5	
3SRm 4/8	3SR 4/8	0.37	0.50		29	29	29	28.5	27.5	25.6	23	19	14	7	
3SRm 4/12	3SR 4/12	0.55	0.75		43.5	43.5	43.5	42.5	41	38.5	34.5	28.5	21	11	
3SRm 4/16	3SR 4/16	0.75	1		58.5	58	58	57	54.5	51	46	38	28	14.5	
3SRm 4/23	3SR 4/23	1.1	1.5		84	83	83	82	79	74	66	55	40	20.5	

※ 3SR5

TYPE		POWER (P ₂)		Q	m³/h	0	0.9	1.8	2.4	3	3.6	4.2	4.8	6	7.2
Single-phase	Three-phase	kW	HP		l/min	0	15	30	40	50	60	70	80	100	120
3SRm 5/5	3SR 5/5	0.25	0.33	H metres	15	14.5	13.8	13	12.1	11.2	10.1	9.1	7	5	
3SRm 5/8	3SR 5/8	0.37	0.5		24	23.5	22.1	20.8	19.4	17.8	16.2	14.6	11.3	8	
3SRm 5/11	3SR 5/11	0.55	0.75		33	32.5	30.5	28.5	26.7	24.5	22.3	20	15.5	11	
3SRm 5/15	3SR 5/15	0.75	1		45	44	41.5	39	36.5	33.5	30.5	27.5	21.1	15	
3SRm 5/23	3SR 5/23	1.1	1.5		69	67.5	63.5	60	56	51.5	46.5	42	32.5	23	


Q = Flow rate H = Total manometric head

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

3SR 3" submersible pumps

MATERIALS AND COMPONENTS

1	Delivery port	Micro-cast AISI 304 stainless steel with thread according to ISO 228/1
2	Check valve	Stainless steel AISI 304
3	Motor bracket	AISI 304 micro-cast stainless steel, sized to NEMA standards
4	Impellers	Delrin® for 3SR 1-2-4 Noryl™ for 3SR 5
5	Diffusers	Noryl™ - AISI 304 stainless steel
6	Diffuser cover	Noryl™ - AISI 304 stainless steel for 3SR 1-2-4 Noryl™ for 3SR 5
7	Pump shaft	Stainless steel AISI 304
8	Pump bearings	Made of AISI 316L stainless steel coated with chromium oxide, for greater durability even in the presence of sand.
9	Tow coupling	Stainless steel AISI 316L
10	Filter	Stainless steel AISI 304
11	Cable sheath	Stainless steel AISI 304
12	Motor 3"	Rewindable oil-submerged motor

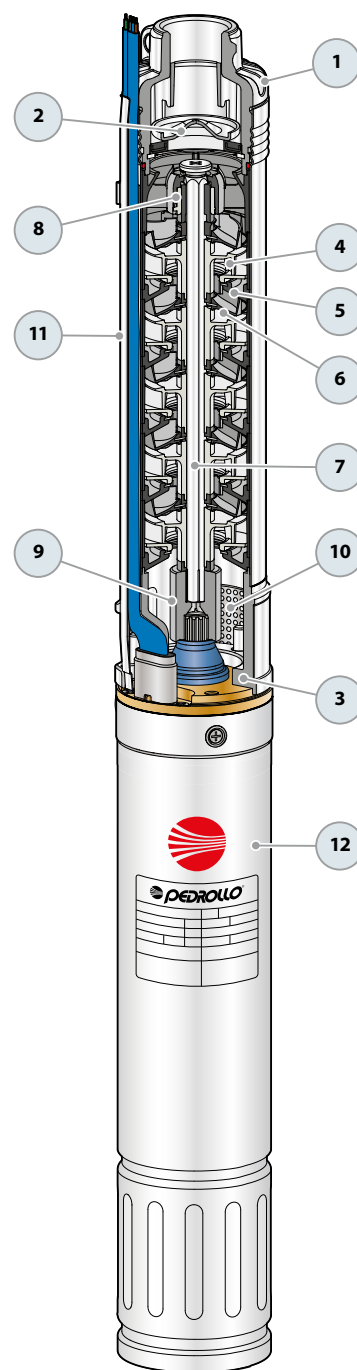

ABSORPTION

Single-phase versions - 230 V

TYPE	Power nominal P ₂		Axial Load	Capacitor (VL=450V)	ABSORPTION
	kW	HP			
230 V / 50 Hz			N	µF	
3SRm 1/14	0.25	0.33	800	12.5	3.2 A
3SRm 1/21	0.37	0.50		12.5	3.4 A
3SRm 1/31	0.55	0.75		16	4.5 A
3SRm 1/42	0.75	1		20	6.0 A
3SRm 1/62	1.1	1.5		30	8.0 A
3SRm 2/10	0.25	0.33	800	12.5	3.2 A
3SRm 2/14	0.37	0.50		12.5	3.4 A
3SRm 2/21	0.55	0.75		16	4.5 A
3SRm 2/28	0.75	1		20	6.0 A
3SRm 2/41	1.1	1.5		30	8.0 A
3SRm 4/5	0.25	0.33	800	12.5	3.2 A
3SRm 4/8	0.37	0.50		12.5	3.4 A
3SRm 4/12	0.55	0.75		16	4.5 A
3SRm 4/16	0.75	1		20	6.0 A
3SRm 4/23	1.1	1.5		30	8.0 A
3SRm 5/5	0.25	0.33	800	12.5	3.2 A
3SRm 5/8	0.37	0.5		12.5	3.4 A
3SRm 5/11	0.55	0.75		16	4.5 A
3SRm 5/15	0.75	1		20	6.0 A
3SRm 5/23	1.1	1.5		30	8.0 A

Three-phase versions - 400 V

TYPE	Power nominal P ₂		Axial Load	ABSORPTION
	kW	HP		
400 V / 50 Hz			N	
3SR 1/14	0.25	0.33	800	1.4 A
3SR 1/21	0.37	0.50		1.5 A
3SR 1/31	0.55	0.75		1.9 A
3SR 1/42	0.75	1		2.6 A
3SR 1/62	1.1	1.5		3.5 A
3SR 2/10	0.25	0.33	800	1.4 A
3SR 2/14	0.37	0.50		1.5 A
3SR 2/21	0.55	0.75		1.9 A
3SR 2/28	0.75	1		2.6 A
3SR 2/41	1.1	1.5		3.5 A
3SR 4/5	0.25	0.33	800	1.4 A
3SR 4/8	0.37	0.50		1.5 A
3SR 4/12	0.55	0.75		1.9 A
3SR 4/16	0.75	1		2.6 A
3SR 4/23	1.1	1.5		3.5 A
3SR 5/5	0.25	0.33	800	1.4 A
3SR 5/8	0.37	0.5		1.5 A
3SR 5/11	0.55	0.75		1.9 A
3SR 5/15	0.75	1		2.6 A
3SR 5/23	1.1	1.5		3.5 A

DIMENSIONS AND WEIGHT

TYPE	PORT	DIMENSIONS mm				kg
Single-ph.	DN	Ø	h1	h2	h3	1~
3SRm 1/14	1"	76	415	388	803	9.9
3SRm 1/21			547	388	935	10.4
3SRm 1/31			736	408	1144	12.0
3SRm 1/42			973	448	1421	14.2
3SRm 1/62			1380	488	1868	17.6
3SRm 2/10	1"	76	377	388	765	9.6
3SRm 2/14			467	388	855	9.9
3SRm 2/21			625	408	1033	11.2
3SRm 2/28			813	448	1261	13.1
3SRm 2/41			1136	488	1624	15.8
3SRm 4/5	1"	76	311	388	699	9.2
3SRm 4/8			407	388	795	9.4
3SRm 4/12			534	408	942	10.5
3SRm 4/16			662	448	1110	12.2
3SRm 4/23			915	488	1403	14.5
3SRm 5/5	1"	76	399	388	787	9.7
3SRm 5/8			550	388	938	10.5
3SRm 5/11			700	408	1108	11.9
3SRm 5/15			901	448	1349	14.1
3SRm 5/23			1303	488	1791	17.3
Three-ph.	DN	Ø	h1	h2	h3	3~
3SR 1/14	1"	76	415	368	783	9.0
3SR 1/21			547	368	915	9.5
3SR 1/31			736	388	1124	11.3
3SR 1/42			973	408	1381	13.3
3SR 1/62			1380	448	1828	16.7
3SR 2/10	1"	76	377	368	745	8.7
3SR 2/14			467	368	835	9.0
3SR 2/21			625	388	1013	10.6
3SR 2/28			813	408	1221	12.2
3SR 2/41			1136	448	1584	15.0
3SR 4/5	1"	76	311	368	679	8.3
3SR 4/8			407	368	775	8.5
3SR 4/12			534	388	922	9.8
3SR 4/16			662	408	1070	11.3
3SR 4/23			915	448	1363	13.6
3SR 5/5	1"	76	399	368	767	9.2
3SR 5/8			550	368	918	10.0
3SR 5/11			700	388	1088	11.4
3SR 5/15			901	408	1309	13.1
3SR 5/23			1303	448	1751	16.2

